


Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	1/7

PRODUCT SPECIFICATION

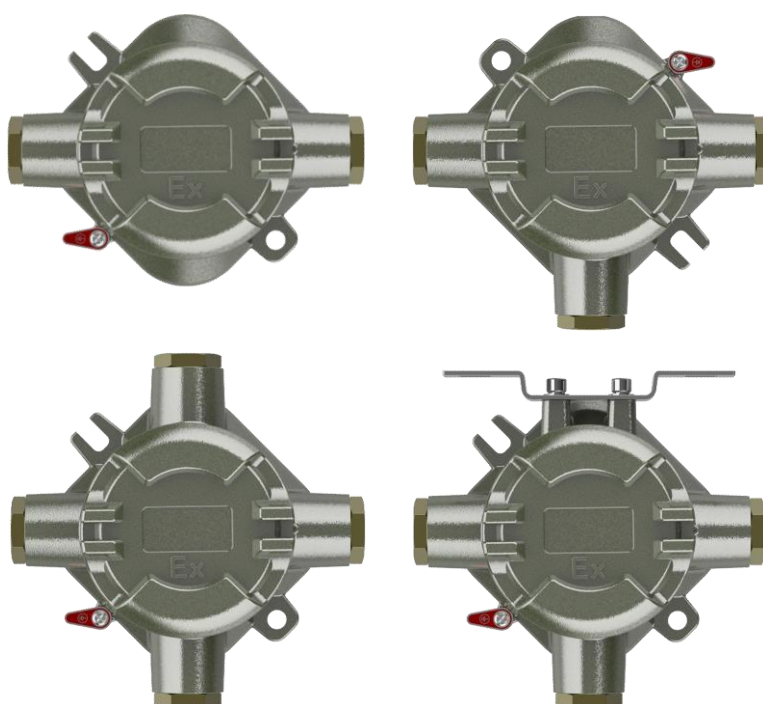

Model	OHBF01	Formulate	Ji Yang
Product name	LED Explosion Proof Connection Box	Proofreading	Fengze Lv
		Review	Dongyang Wu
		Approve	Dongyang Wu
		Date	2019.5.30

Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	2/7

CONTENTS

1. Picture of real products 3

2. Features 5

3. Product parameters 5


4. Dimensions 6

5. Packaging logistics 7


6. Quality Assurance..... 7

Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	3/7


1. Picture of real products

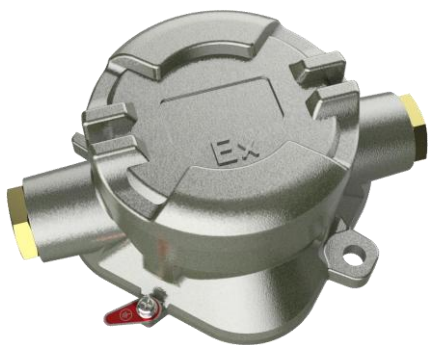


OHBF-AH

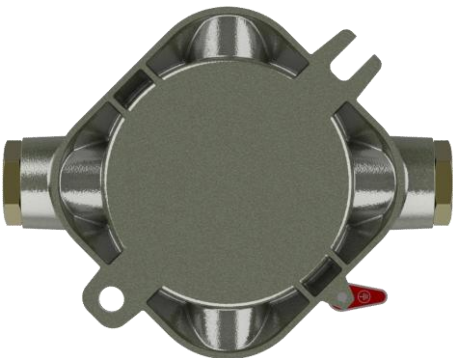

OHBF-AH

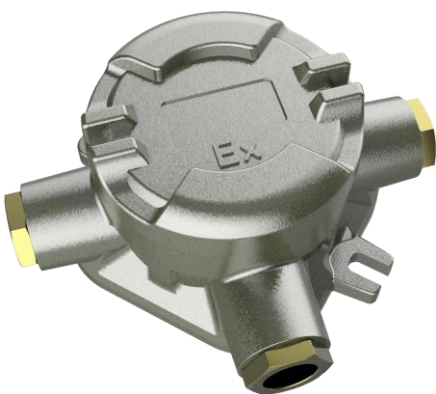

OHBF-AH-3

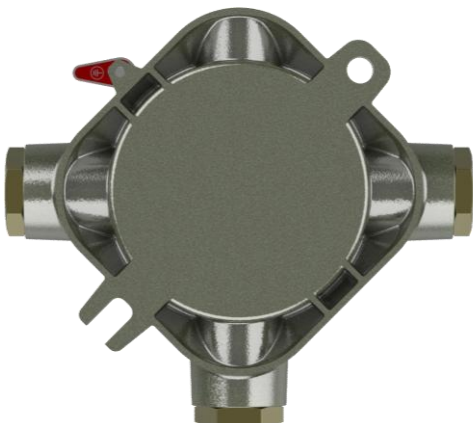


OHBF-AH-3


Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	4/9




OHBF-AH-4

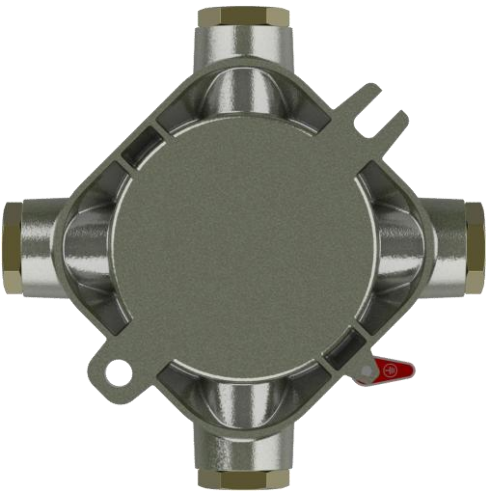

OHBF-AH-4

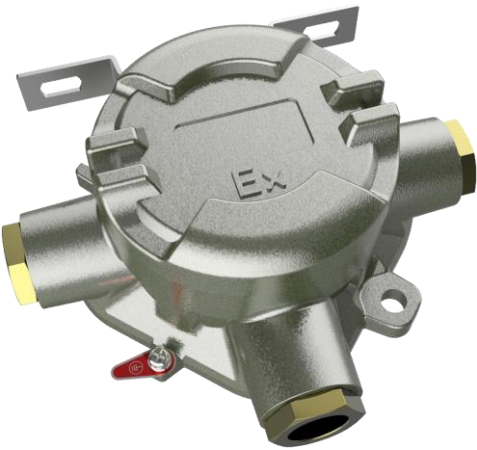

OHBF-AHH

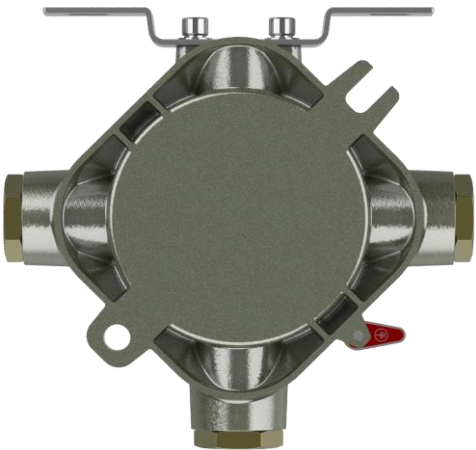

OHBF-AHH

Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	5/7

2. Features

2.1 Application

This product has good explosion-proof function, suitable for IIA, IIB, IIC explosive gas environment and various inflammable and explosive places, mainly used in railway, electric power, metallurgy, petroleum, petrochemical, chemical, steel, aviation, ship and each Efficient lighting in factories, stations, large facilities, venues and other places.

2.2 Product Features


2.2.1 The shell is made of cast aluminum alloy by die casting, and the surface is coated with high-voltage electrostatic spraying.

2.2.2 There are various ways and specifications for inlet and outlet lines.

2.2.3 The screw threads at the inlet and outlet can be customized and can be made into metric threads, NPT threads, etc.



2.2.4 Steel pipe or cable wiring is acceptable.

3. Product parameters


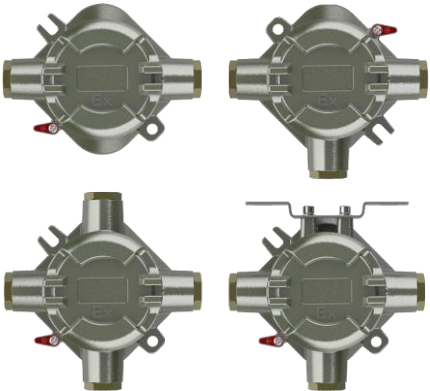
Item	Symbol	Description	Unit
Picture of real products			
Rated Voltage	VOLT	AC220/380	V
Rated Current	/	20	A
Input and Outlet Size		G3/4"	
Protection Level	IP	IP66	IP
Anti-corrosion Grade	/	WF2	
Explosion proof grade	/	Ex db IIC T6	

Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	6/7



4.Dimensions

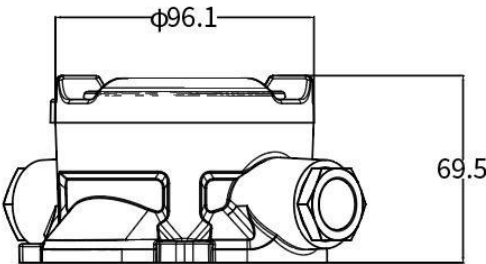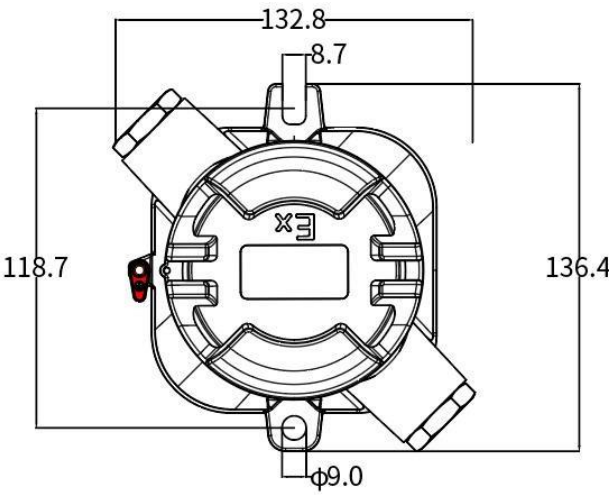

Two Ways (OHBF-AH)

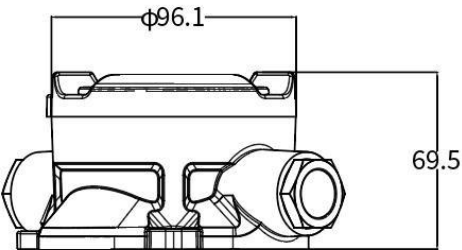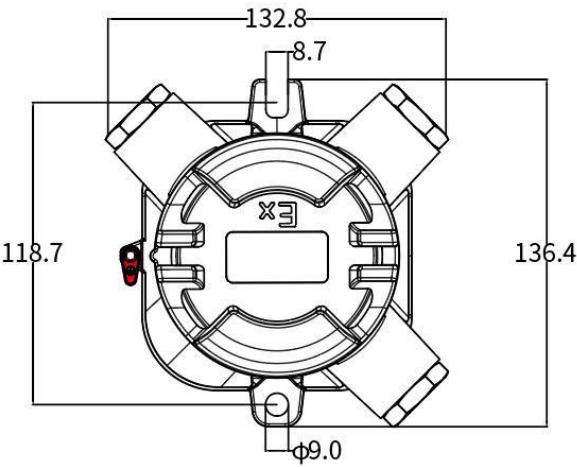


Three Ways (OHBF-AH-3)

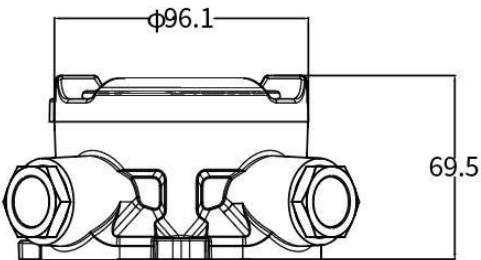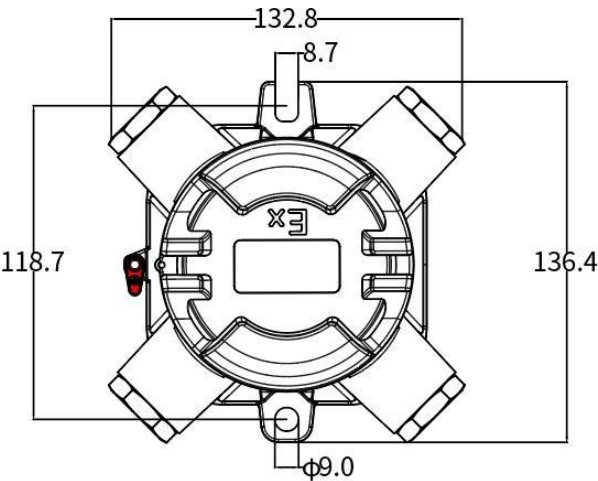

Doc. No.			
Version:1.0	Audit No.: 0	In Total 7 Pages	7/7

Four Ways (OHBF-AH-4)

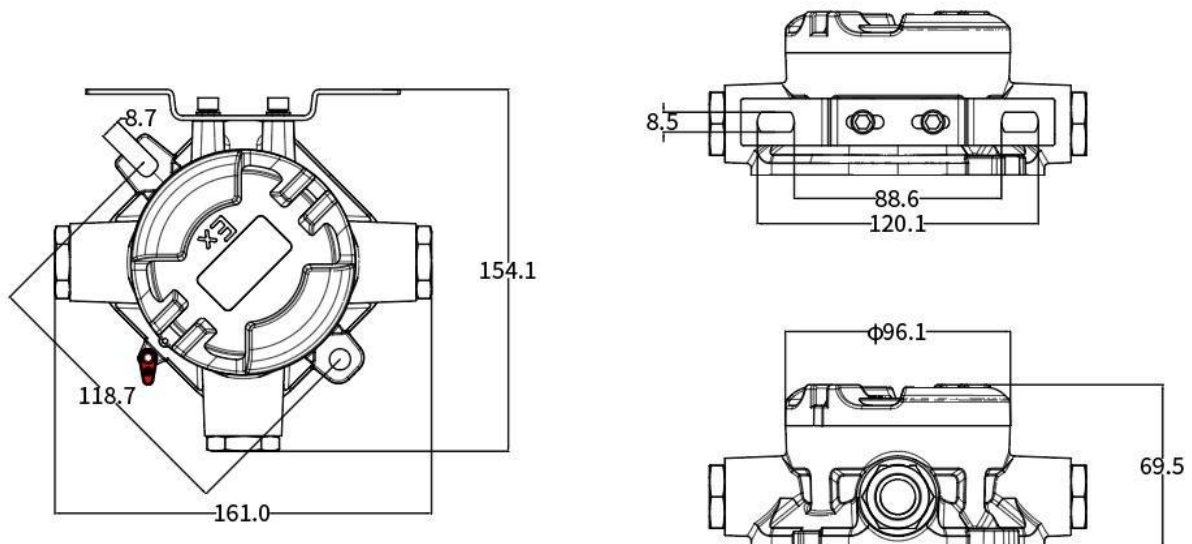

Suspended Three Ways (OHBF-AHH)

5. Packaging logistics

Name	Description	Quantity	Name	Parameter
Outer box	35.2*32.2*27.2cm	1	N.W.	kgs
Inner box	15*15*8.5cm		G.W.	kgs
Packaging method		12pcs/carton		

6. Quality Assurance

Our company has passed the ISO9001:2015 international quality system audit certification, and our products are strictly produced in accordance with the ISO9001 international quality management system standard, ensuring that the product quality fully meets national standards and design requirements. Anyone who purchases products produced by our company can enjoy the quality three guarantees service. Please refer to the product warranty card for specific related items.